


**Kneader** 

### SPECIFICATION:



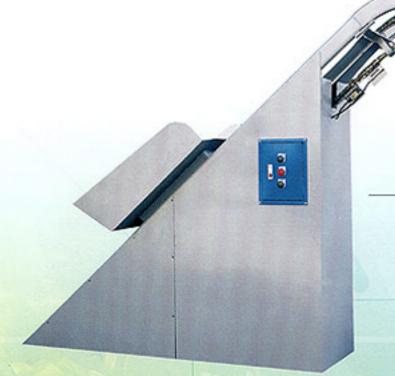

### **Bucket Conveyor**

#### SPECIFICATION:

Power	2HP
Bucket dimension size	860x900x300 m/m
Machine size	3100x860x2270 m/m
Machine weight	445kgs




### SPECIFICATION:

Twin-elbow feeding type pelletizing machine suitable

tch production	on	
SM120	SM150	SM165
1:12	1:12	1:12
6P x 75HP	6P x 100HP	6P x 100H
5 Sets	5 Sets	5 Sets
15kw	20kw	28kw
200 kg/hr	300 kg/hr	400 kg/hr
10HP	15HP	15HP
3HP	ЗНР	ЗНР
Air cooling or water cooling		
Water cooling		
Oil bath		
Two speed	Two speed	One speed
4500kgs	4800kgs	6200kgs
	SM120 1:12 6P x 75HP 5 Sets 15kw 200 kg/hr 10HP 3HP Air coo Two speed Up-down open 5000x2000 x1600m/m	1:12 1:12 6P x 75HP 6P x 100HP 5 Sets 5 Sets 15kw 20kw 200 kg/hr 300 kg/hr 10HP 15HP 3HP 3HP Air cooling or water Water cooling Oil bath Two speed Two speed Up-down open type or hydrawic 5000x2000 5200x2100 x1600m/m x1600m/m

# **Double Elbow Pelletizing Machine**

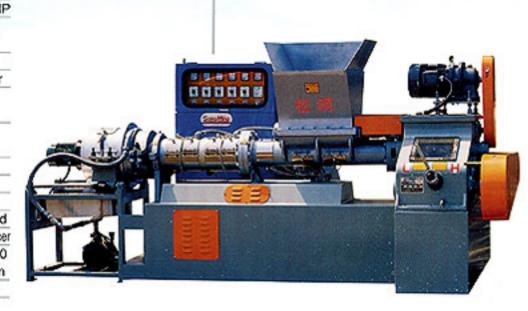

### **Blower**




## **Separator**

#### SPECIFICATION:


Power	1/4 x 2 HP
Vibrating channel size	2800x500x80 m/m
Cooling Blower	1/4HP x 2
Output	800 kgs/hr
Machine size	3000x720x1270 m/m
Machine weight	340 kgs

**Blending Tank** 

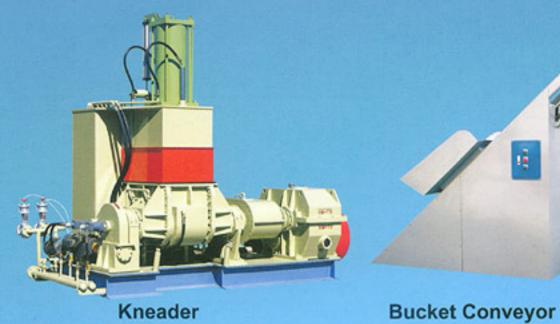










**Vertical Cooling** Tank & Blower



**Vibrating Screener** 



**Blending Tank** 


# **TPR Pelletizing Plant: Water Cut Model**




Kneader



**Bucket Conveyor** 



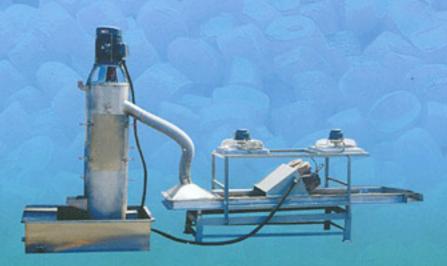


Separator

Vibrating Screener



**Blower** 



**Blending Tank** 

## **Fully Auto Three Colors Foam Injection & Shaping Machine**

This model is produced by our several year's experience and first developed sucessfully with multi-function for multi-purpose on the shoes-making machine. It is most suitable for plasticizing plastic material PVC, TPR, TPU and specialized to

produce for single color, two color, three color foaming or non-foaming, etc. various shoes.

#### FEATURES:

- · This machine equips with injection pressure regular at each station. Ensure can meet different type mould, products high quality request.
- · Injection part: constructed by to injections, screw rod running directly driven by hydraulic motor.
- · On-off die hydraulic cylinder adopts of special design of mother son cylinder design featured with high-speed low-pressure die closing and low-speed high-pressure die clamping.
- Round disc adopts of hydraulic motor driving, and is featured with high speed running, low speed stop.
- · Pressure adopts of single-adjusting to increase the stability, safety, and easy to operate.
- · Computerized accurate P.L.C control system, easy for operation and machine maintenance.














油壓電池閥、壓力開關















單相、三相齒輪減速機

- WASTE PLASTIC RECLAMATION
   & PELLET REGERATING
   MACHINE
- WHOLE PLANT EQUIPMENT MANUFACTURING OF EVA & TPR & PVC PELLETIZING
- PLASTIC GRANULATOR, KNIFE GRINDER & IT'S SURROUNDING EQUIPMENTS
- COMPLETE SET OF HI-SPEED MIXER & VERTICAL COOLING BLENDER.AND OTHERS









SONG MING MACHINERY INDUSTRIES CO., LTD.

No. 5, Alley 15, Lane 182, Kung Yia Rd., Chung Ho Villang, Lung Ching 434 Taichung Taiwan R.O.C.

Tel:+886-4-26398161

Fax:+886-4-26398162